


ASSEMBLY INSTRUCTIONS FOR YOUR  
HALO SINGLE SCONCE

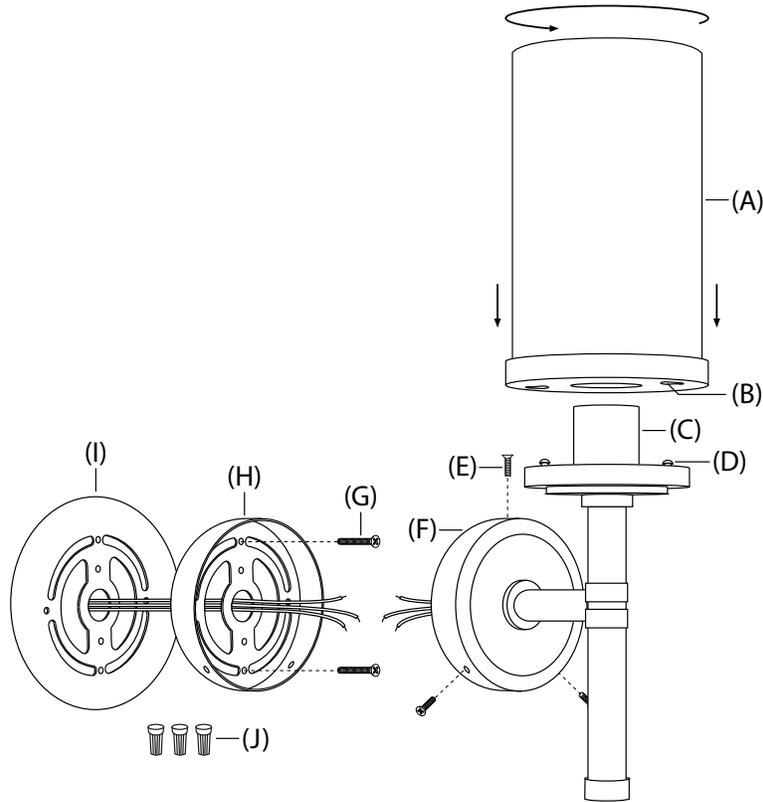

**IMPORTANT SAFETY INSTRUCTIONS:**

- \* These instructions are provided for your safety. It's important that all safety instructions are read before beginning installation of fixture.
- \* We **STRONGLY** recommend installation by a licensed electrician.
- \* Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.
- \* Do not connect the electricity until lamp is fully assembled.

**ASSEMBLY INSTRUCTIONS:**

1. SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER. IT IS RECOMMENDED THAT A LICENSED ELECTRICIAN INSTALL THIS FIXTURE.
2. Remove mounting plate (H) from backplate (F) by removing screws (E). Set screws (E) aside.
3. Hold mounting plate (H) up to wall outlet box. If the wall outlet box is larger than mounting plate (H), adapter plate (I) will need to be used behind mounting plate (H).
4. Carefully pull the wiring from wall outlet box. Thread the wires through the center hole in mounting plate (H) and adapter plate (I), if necessary.
5. Affix mounting plate (H) and adapter plate (I) (if necessary) to wall outlet box with mounting screws (G) provided.
6. Make proper electrical connections described in steps 7 - 9. A LICENSED ELECTRICIAN IS RECOMMENDED.
7. Connect ground (green or silver in color) wire from fixture to ground wire in the outlet box. Fasten wires together with wire nut (J) and tightly wrap the connection with electrical tape.
8. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (J) and tightly wrap connection with electrical tape.
9. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (J) and tightly wrap connection with electrical tape.
10. Slide backplate (F) over mounting plate (H). Thread screws (E) into vacant holes at the top and bottom of backplate (F) to secure the fixture to the mounting surface.
11. Lower shade (A) over socket (C) so alignment pins (D) fit into holes (B). Rotate shade (A) clockwise to secure it to the fixture.
12. Insert one (1) 60W MAX. Type A medium base bulb into socket (C).
13. Reconnect main electrical supply at the fuse box/circuit breaker and test the fixture.

\*\* To clean, use a soft dry cloth. Do not use any chemical or abrasive cleaners as they may damage the finish. \*\*